



MASTER SON-T PIA Plus



MASTER SON-T PIA Plus 70W/220 E27 1SL/12

High Pressure Sodium lamp with clear tubular outer bulb, high output and long reliable lifetime

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information	
Cap-Base	E27 [E27]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 5% Failures (Nom)	17000 h
Life To 10% Failures (Nom)	20000 h
Life to 20% Failures (Nom)	23500 h
Life to 50% Failures (Nom)	30000 h
ANSI Code HID	-
System Description	External Ignitor
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	99 %
LSF 16000 h Rated	96 %
LSF 20000 h Rated	90 %

Flux measurement reference	Sphere
Light technical	
Color Code	220 [CCT of 2000K]
Luminous Flux (Nom)	6600 lm
Luminous Flux (Rated) (Nom)	6600 lm
Lumen Maintenance 2000 h (Nom)	86 %
Lumen Maintenance 20000 h	76 %
Lumen Maintenance 5000 h (Nom)	82 %
Chromaticity Coordinate X (Nom)	0.54
Chromaticity Coordinate Y (Nom)	0.42
Correlated Color Temperature (Nom)	1900 K
Luminous Efficacy (rated) (Nom)	90 lm/W
Color Rendering Index (Max)	25
Color Rendering Index (Nom)	-
LLMF 2000 h Rated	86 %
LLMF 4000 h Rated	83 %

MASTER SON-T PIA Plus

LLMF 6000 h Rated	81 %
LLMF 8000 h Rated	80 %
LLMF 12000 h Rated	80 %
LLMF 16000 h Rated	79 %
LLMF 20000 h Rated	76 %
Ratio Scotopic/Photopic Lumens	0.50

Operating and electrical

Lamp supply voltage	230 V [230]
Power (Nom)	73.0 W
Lamp Current (EM) (Nom)	0.96 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	1800 V
Re-Ignition Time (Min) (Max)	30 s
Ignition Time (Max)	5 s
Voltage (Max)	105 V
Voltage (Min)	75 V
Voltage (Nom)	92 V

Controls and dimming

Dimmable	Yes
Run-Up Time 90% (Max)	4 min

Mechanical and housing

Bulb Finish	Clear
Cap-Base Information	-
Bulb Shape	T35 [T 35mm]

Approval and application

Energy Efficiency Class	G
Mercury (Hg) Content (Max)	12.2 mg
Mercury (Hg) Content (Nom)	12.2 mg
Energy Consumption kWh/1000 h	73 kWh
EPREL Registration Number	473391


Luminaire design requirements

Bulb Temperature (Max)	350 °C
Cap-Base Temperature (Max)	200 °C
Cap-Base Temperature (Max)-DUP(do not use)	392 °F

Product data

Full product code	871150019266015
Order product name	MASTER SON-T PIA Plus 70W/220 E27 1SL/12
EAN/UPC - Product	8711500192660
Order code	928152700028
Numerator - Quantity Per Pack	1
Local code description	4825502
Numerator - Packs per outer box	12
Material Nr. (12NC)	928152700028
Net Weight (Piece)	0.048 kg
ILCOS Code	ST-70-H/S-E27

Dimensional drawing

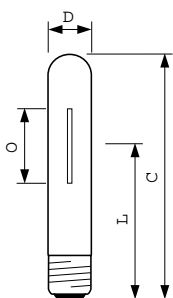


MASTER SON-T PIA Plus 70W/220 E27 1SL/12

Product	D (max)	O	L	C (max)
MASTER SON-T PIA Plus 70W/220 E27 1SL/12	36 mm	42 mm	104 mm	156 mm


MASTER SON-T PIA Plus

Photometric data

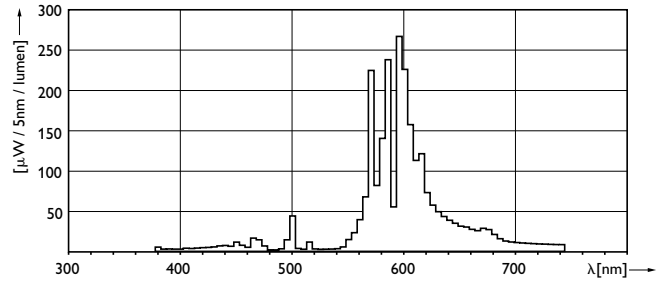



LDLD_SON-TPIA-Light distribution diagram

LDPB_SON-TPIA_0015-Spectral power distribution B/W

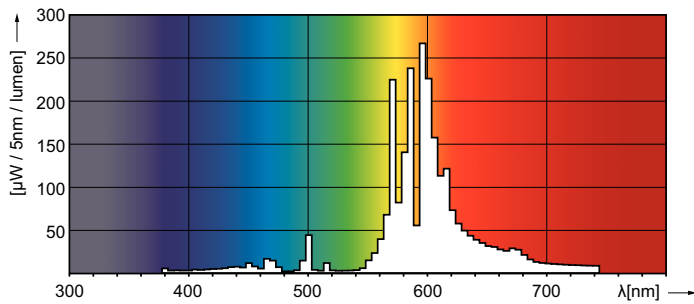

LDPO_SON-TPIA_0015-Spectral power distribution Colour

Lifetime

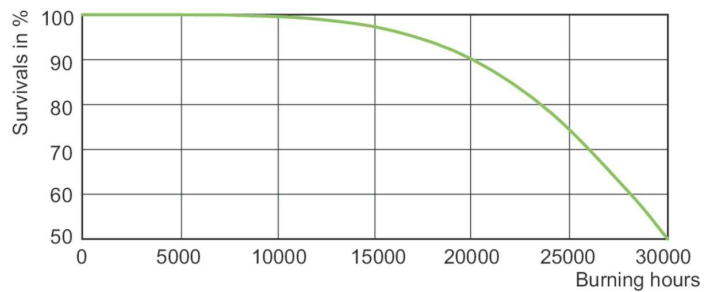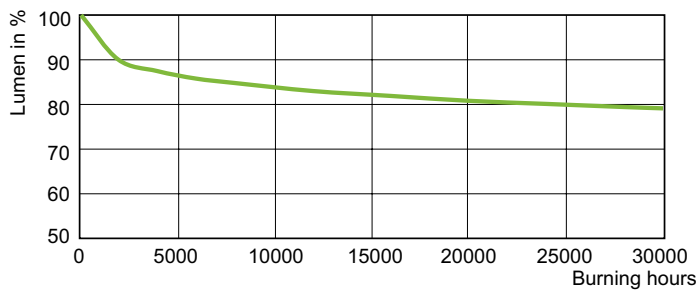

LDLM_SON-TPIA_0008-Lumen maintenance diagram

LDLE_SON-TPIA_0008-Life expectancy diagram

MASTER SON-T PIA Plus

