



AT 6000h
LLMF > 0.90
LSF > 0.90

On/Off
> 200,000
(1'on/3'off)

Warming Time
< 0,5s

< 0,5s
starting time

SDCM
< 6

Ra
≥ 80


330°

λ
0.50

175-250V-
50-60Hz

30.000 h

Ordercode	Base	Power	CCT	luminous flux	Cover	EAN13	Laser Optical Reading
LL-J785C	R7S	5W	3000K	480lm	Transparent PC	8059617675196	
LL-J785F	R7S	5W	6400K	500lm	Transparent PC	8059617675202	

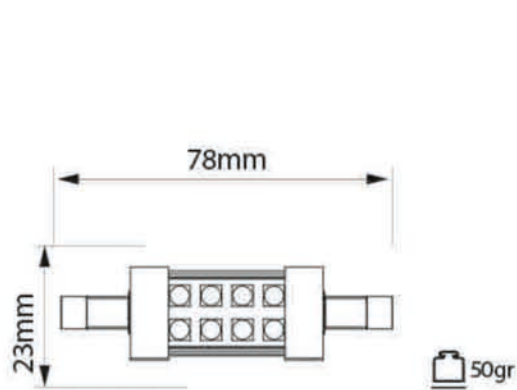

inner box quantity 10 Pcs
 outer box quantity 50 Pcs
 L.22cm x H.17cm x P.48cm

 5.0 Kg

kWh/1000h